



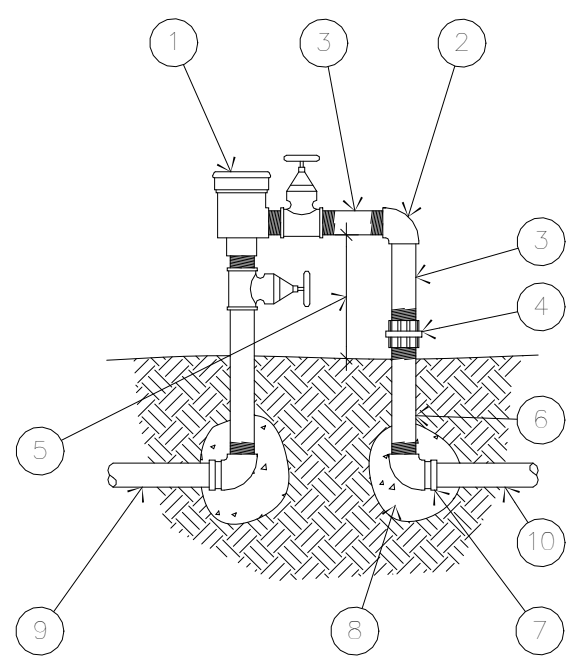

1. PRESSURE BACKFLOW PREVENTER.
2. GALVANIZED ELL.
3. GALVANIZED NIPPLE, 6" (TYP. OF 2).
4. UNION.
5. BOTTOM OF NIPPLE TO BE 6" HIGHER THAN TOP OF HIGHEST HEAD OF SYSTEM.
6. GALVANIZED NIPPLE (LENGTH AS REQUIRED).
7. PVC WITH SXT MALE ADAPTER (TYP. OF 2).
8. CONCRETE THRUST BLOCK.
9. SCHEDULE 60 FROM METER.
10. CLASS 200 TO ELEC. VALVE.


NOTES:
A. INSTALL BACKFLOW PREVENTER 12" ABOVE HIGHEST DOWNSTREAM PIPE OUTLET.
B. FOR CORROSION PROTECTION, WRAP CLASS 200 BELOW FINISH GRADE.

A PRESSURE BACKFLOW PREVENTER

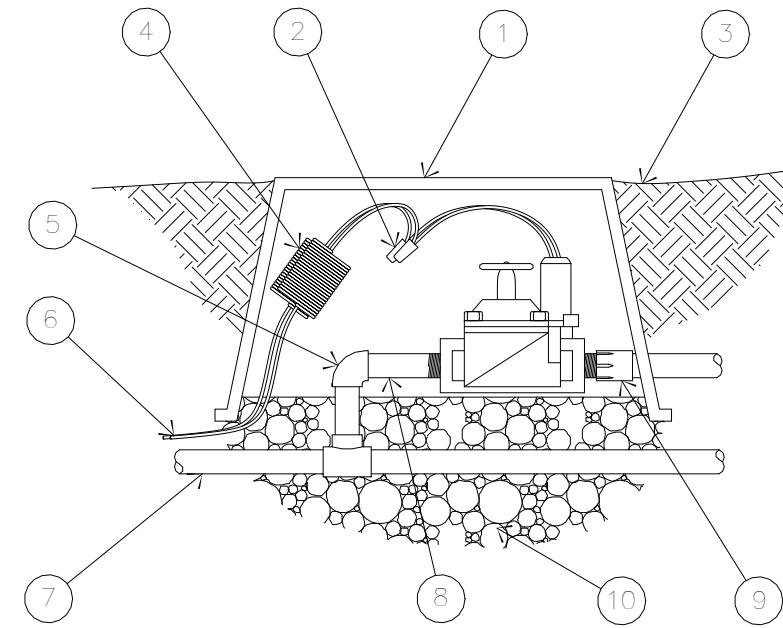


1. VALVE BOX WITH U.D.
2. VENT PIPE WIRE CONNECTION.
3. FINISH GRADE.
4. EXPANSION COIL.
5. SCHEDULE 40 PVC 90° ELL.
6. UF 1/4 14 GA. WIRE TO CONTROLLER.
7. PVC MAIN.
8. SCHEDULE 30 PVC TOE NIPPLE.
9. SCHEDULE 40 PVC MALE ADAPTER.
10. PEA GRAVEL SUMP, MIN. 12" DEEP.

B AUTOMATIC CONTROL VALVE

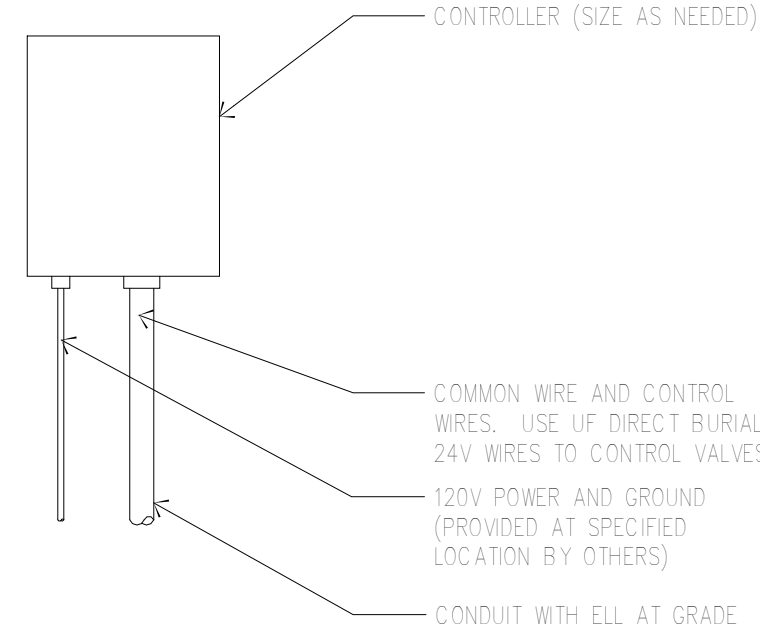


NOTES:
A. SEE MANUAL FOR CONTROLLER MOUNTING INSTRUCTIONS.
B. ALL WIRING TO BE INSTALLED AS PER LOCAL CODES.
C. BURY WIRE WITH MAIN LINE WHEN POSSIBLE, 18" DEPTH MIN., TWIST TIE AT 10'-0" O.C.

C IRRIGATION CONTROLLER

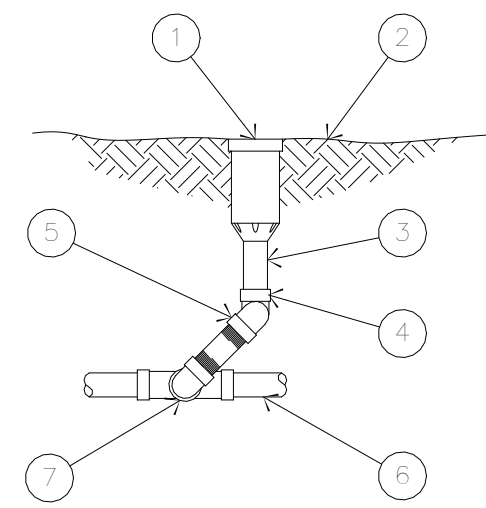


1. 570 POP-UP SPRINKLER HEAD.
2. FINISH GRADE.
3. THREADED NIPPLE.
4. SCHEDULE 80 PVC ELL.
5. SCHEDULE 80 PVC STREET ELLS.
6. TEFLOW TAPE ON ALL THREADED CONNECTIONS.
7. PVC LATERAL PIPE, ELL OR TEE.

D 570 POP-UP HEAD

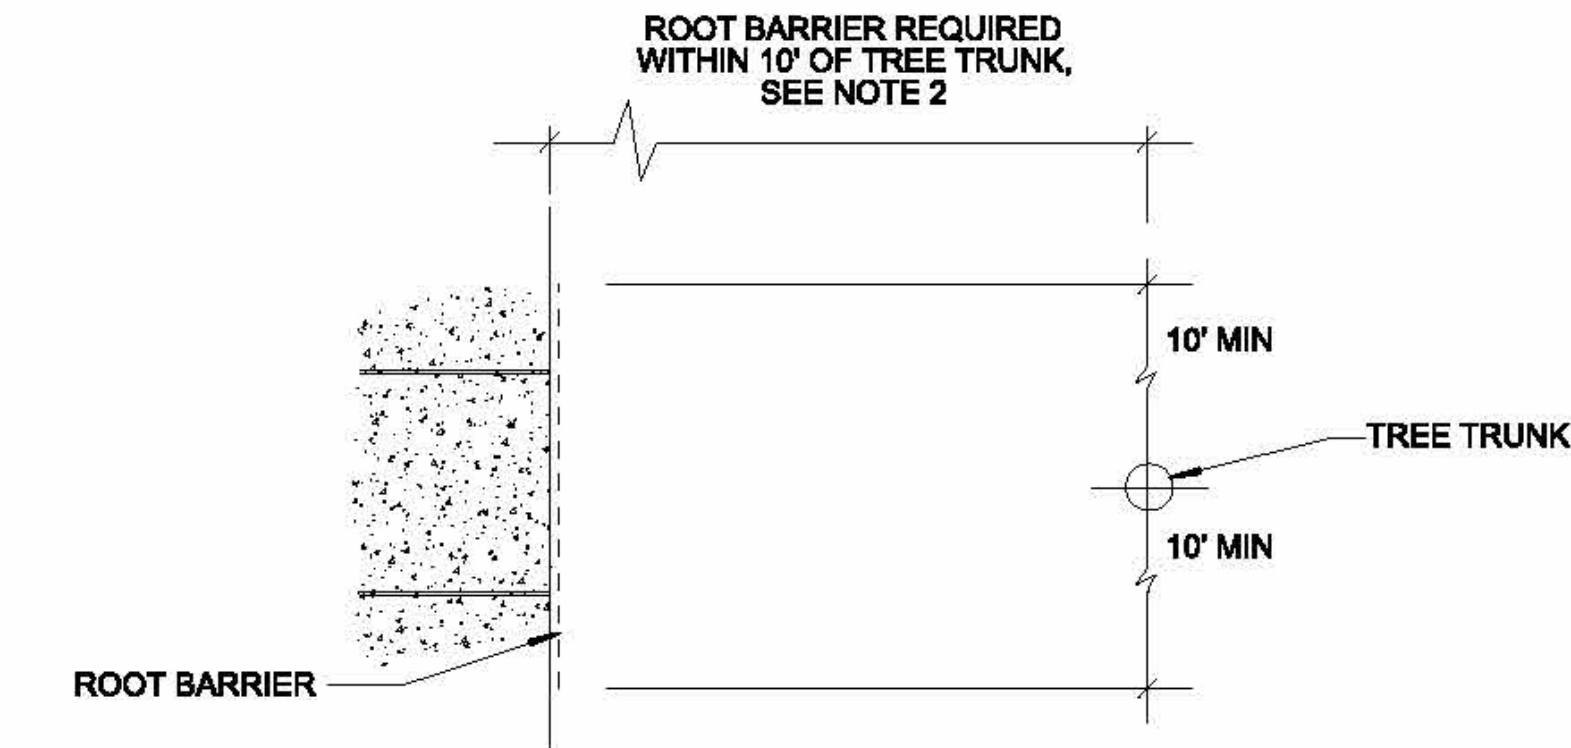

PLAN VIEW

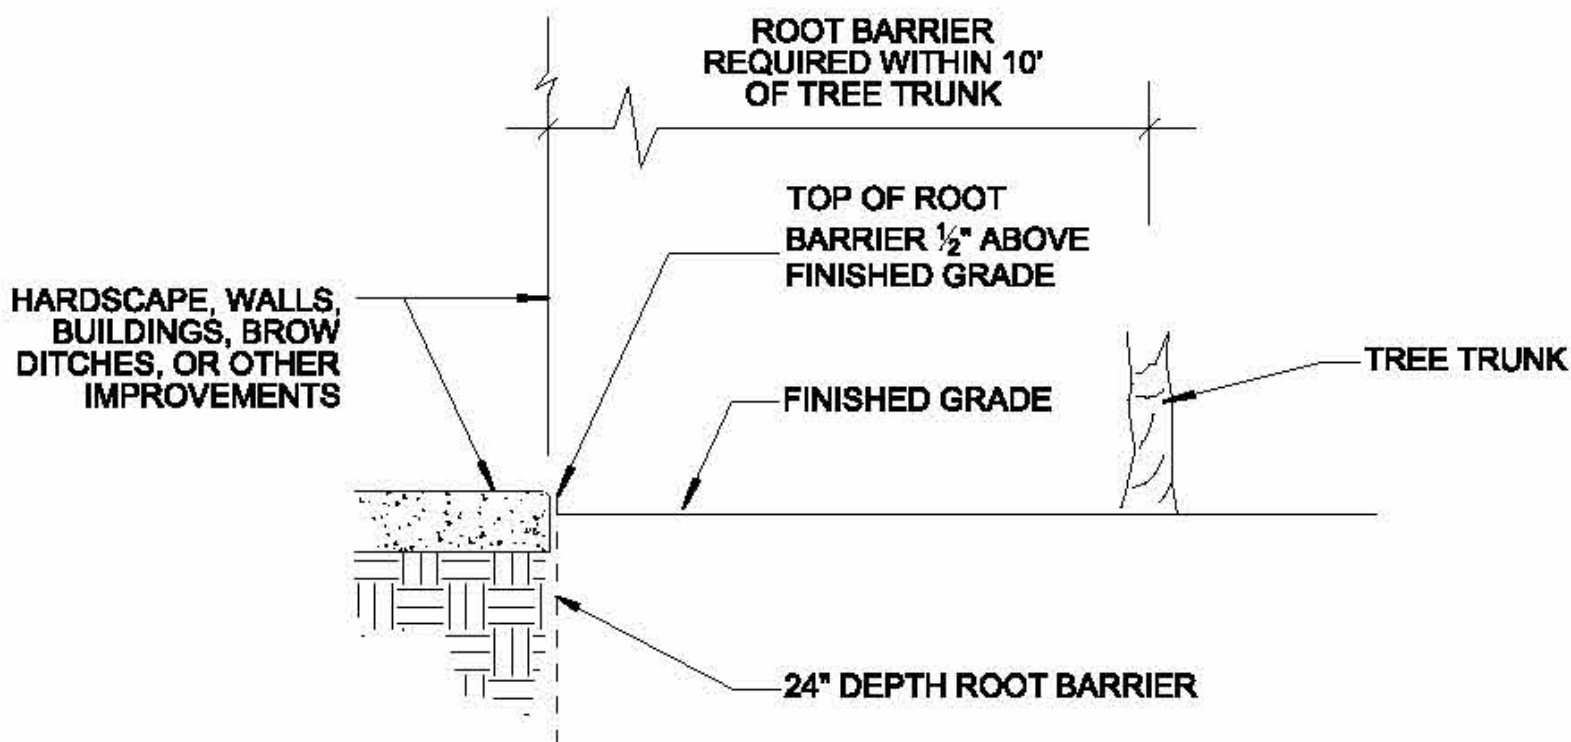


SECTION

- NOTE:
1. ROOT BARRIER SHALL BE INSTALLED ADJACENT TO THE IMPROVEMENT AND NOT AROUND THE ROOTBALL.
 2. ROOT BARRIER REQUIRED WHEN TREE TRUNK IS WITHIN 10' OF HARDSCAPE, WALLS, BUILDINGS, BROW DITCHES, OR OTHER IMPROVEMENTS.
 3. FOR ROOT BARRIER INSTALLATION WITH THE TREE GRATES SEE SDL-104.

REVISION	BY	APPROVED	DATE	CITY OF SAN DIEGO - STANDARD DRAWING	RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE
ORIGINAL*	KA	J. NAGELVOORT	01/12		
REDRAFTED	CD	J. NAGELVOORT	09/18		

COORDINATOR R.C.E. 86528 DATE 9/4/18

DRAWING NUMBER SDL-106

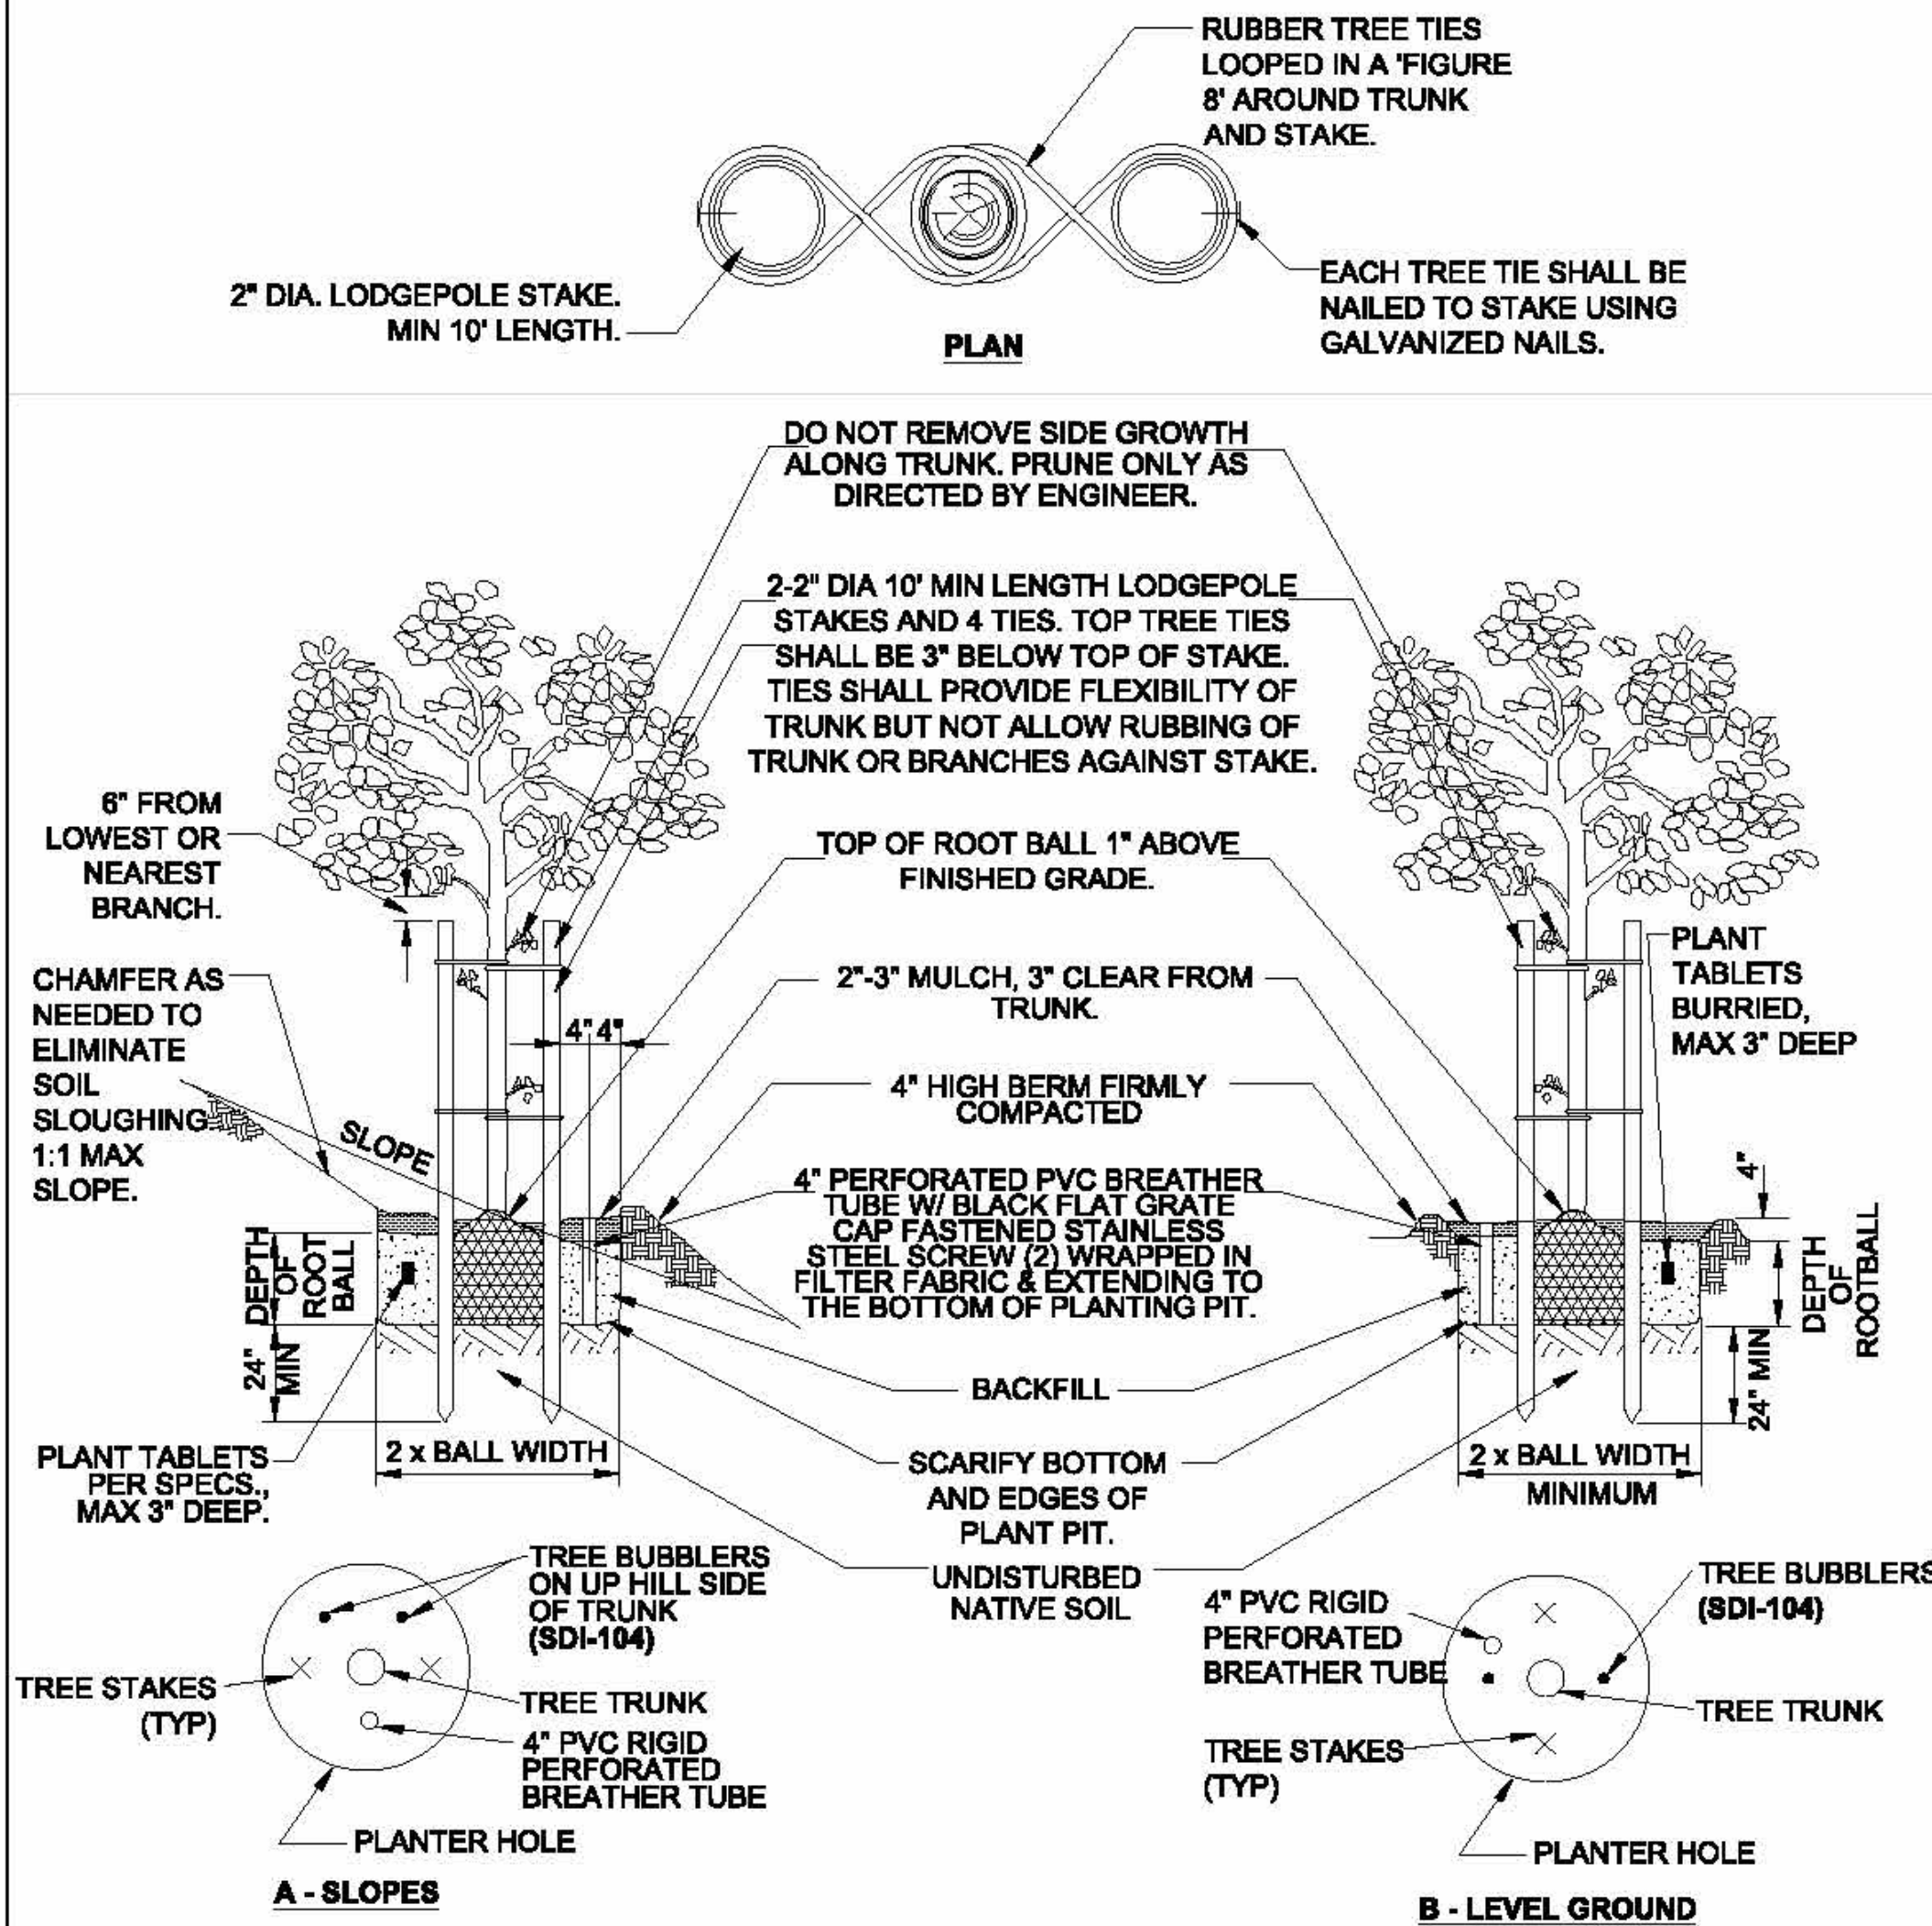


NOTES

1. DOUBLE STAKE 15 GAL. AND LARGER TREES. SINGLE STAKE TREES SMALLER THAN 15 GAL.
2. FOR SINGLE STAKED TREES, PLACE STAKE ON WINDWARD SIDE OF TREE.
3. LOCATE STAKES OUTSIDE OF ROOTBALL.
4. PROVIDE MINIMUM DISTANCE FROM OTHER OBJECTS AS FOLLOWS:
20' TRAFFIC SIGNALS, 12' STREET LIGHTS, 10' FIRE HYDRANTS, SEWER LINES AND SDG&E FOR PAD MOUNTED EQUIPMENT, AND 5' UNDERGROUND SDG&E ELECTRIC AND GAS LINES.


REVISION	BY	APPROVED	DATE	CITY OF SAN DIEGO - STANDARD DRAWING	RECOMMENDED BY THE CITY OF SAN DIEGO STANDARDS COMMITTEE
ORIGINAL*	SG	J. NAGELVOORT	01/12		
REDRAFTED	CD	J. NAGELVOORT	09/18		

COORDINATOR R.C.E. 86528 DATE 9/4/18

DRAWING NUMBER SDL-101

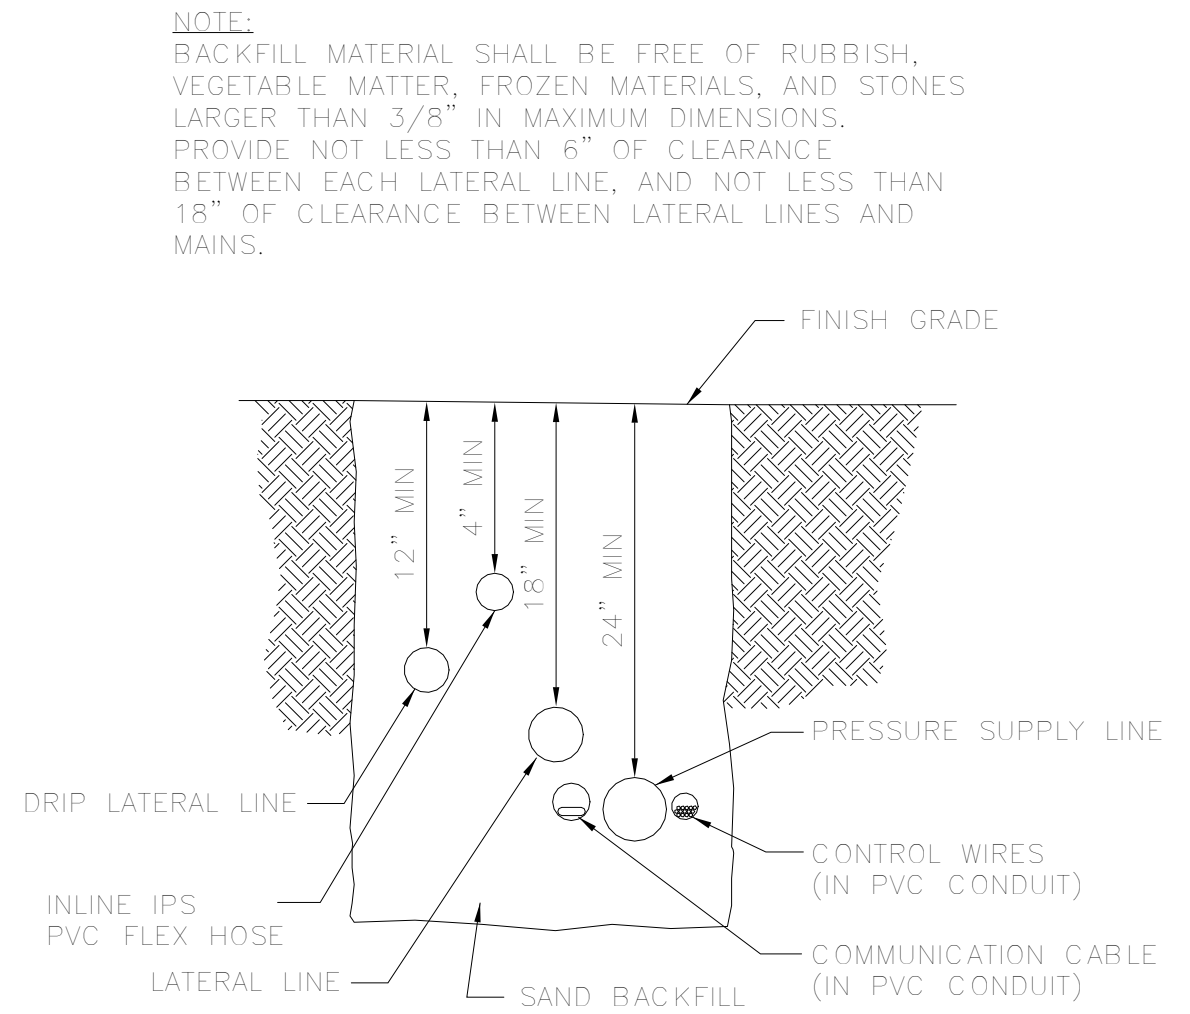

TRENCHING - OPEN AREAS

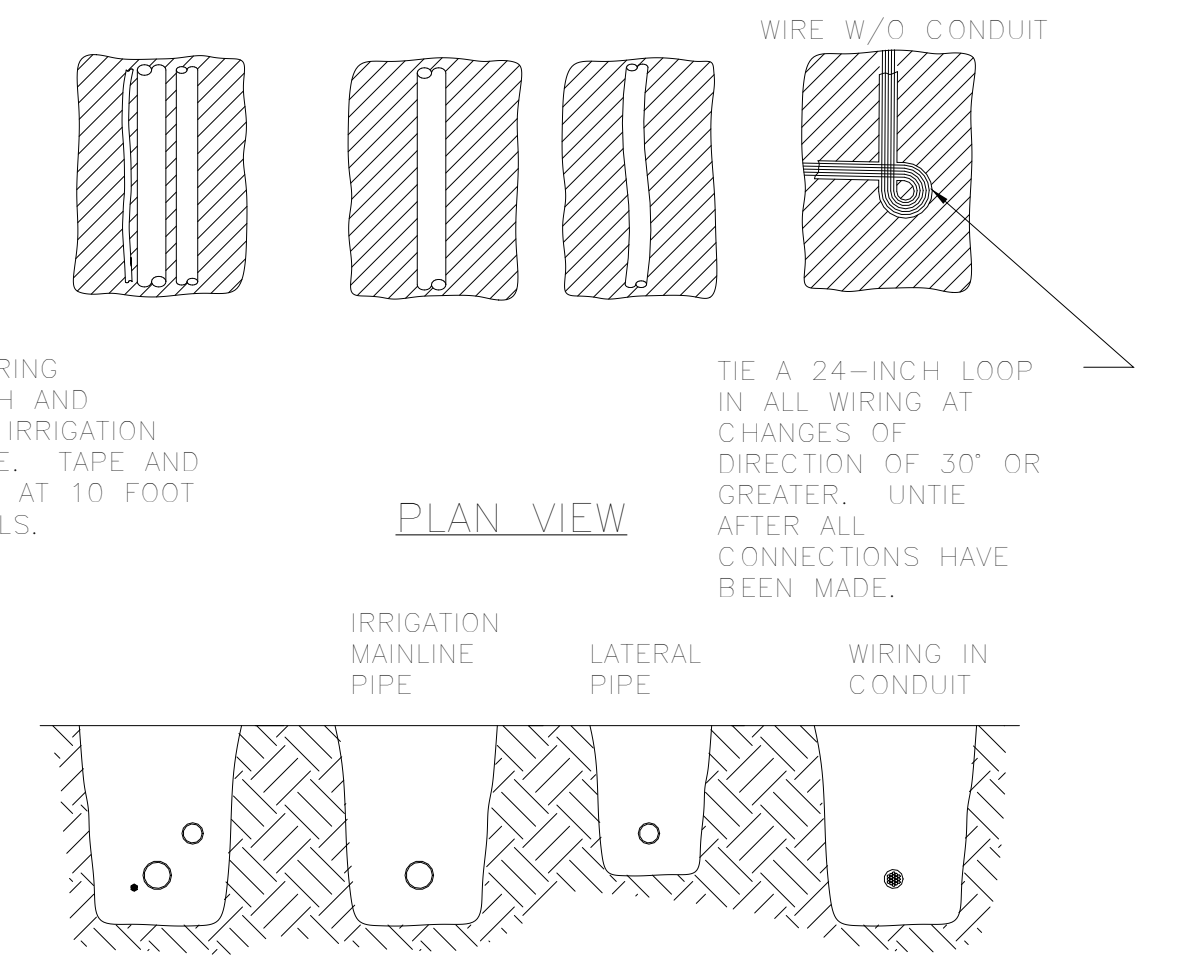

SECTION VIEW

- NOTE:
1. SLEEVE BELOW ALL HARDSCAPE ELEMENTS WITH CLASS 200 PVC TWICE THE DIAMETER OF THE PIPE OR WIRE BUNDLE WITHIN.
 2. FOR PIPE AND WIRE BURIAL DEPTHS SEE SPECIFICATIONS.
 3. ALL SOLVENT WELD PLASTIC PIPING TO BE SNAKED IN TRENCH AS SHOWN.

H IRRIGATION PIPE AND WIRE TRENCHING DETAIL